

4 OPENING A.PPEDFILE

You can open a new .pped file or an existing .pped file to edit the database that operates the BEAR PPDT.

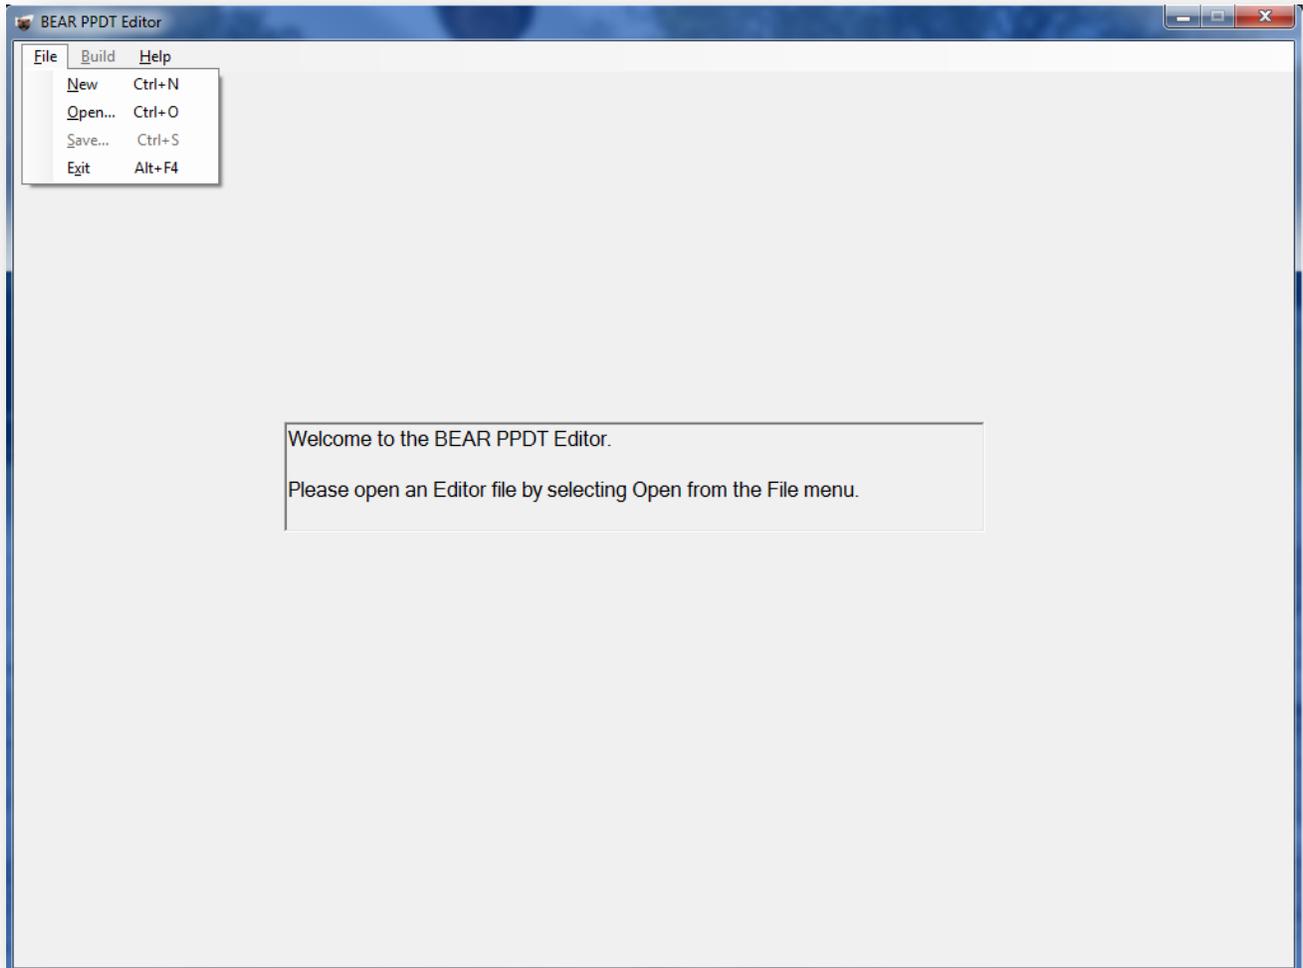


FIGURE 6 FILE MENU



4.1 OPENING A NEW .PPED FILE

Open a new.pped file to edit the database that operates the BEAR PPDT.

- 1) From the **File** menu, select **New**.

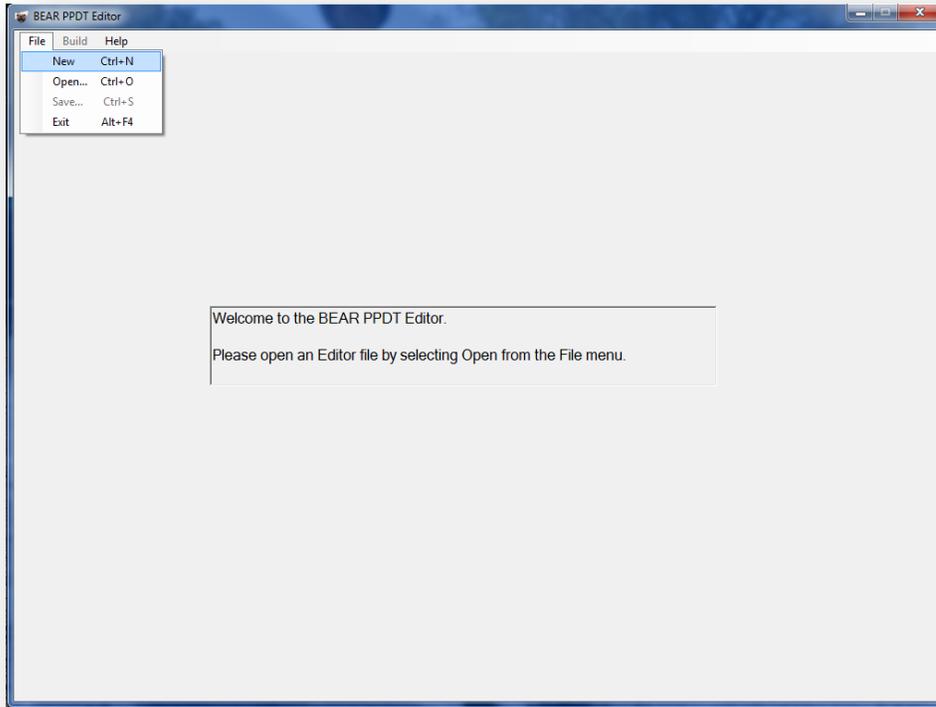


FIGURE 7NEW

- 2) When the **Loading Default DB** window is displayed, select the **OK** button.

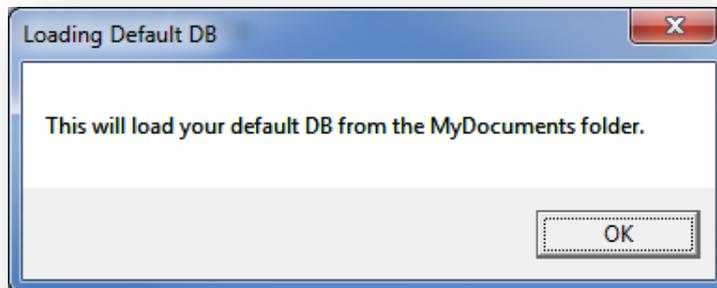


FIGURE 8LOADING DEFAULT DB WINDOW



3) The default database is loaded into the Editor. This is your new .pped file.

[Return to the **Procedures** section of the manual.](#)



4.2 OPENING AN EXISTING .PPED FILE

- 1) From the **File** menu, select **Open**.

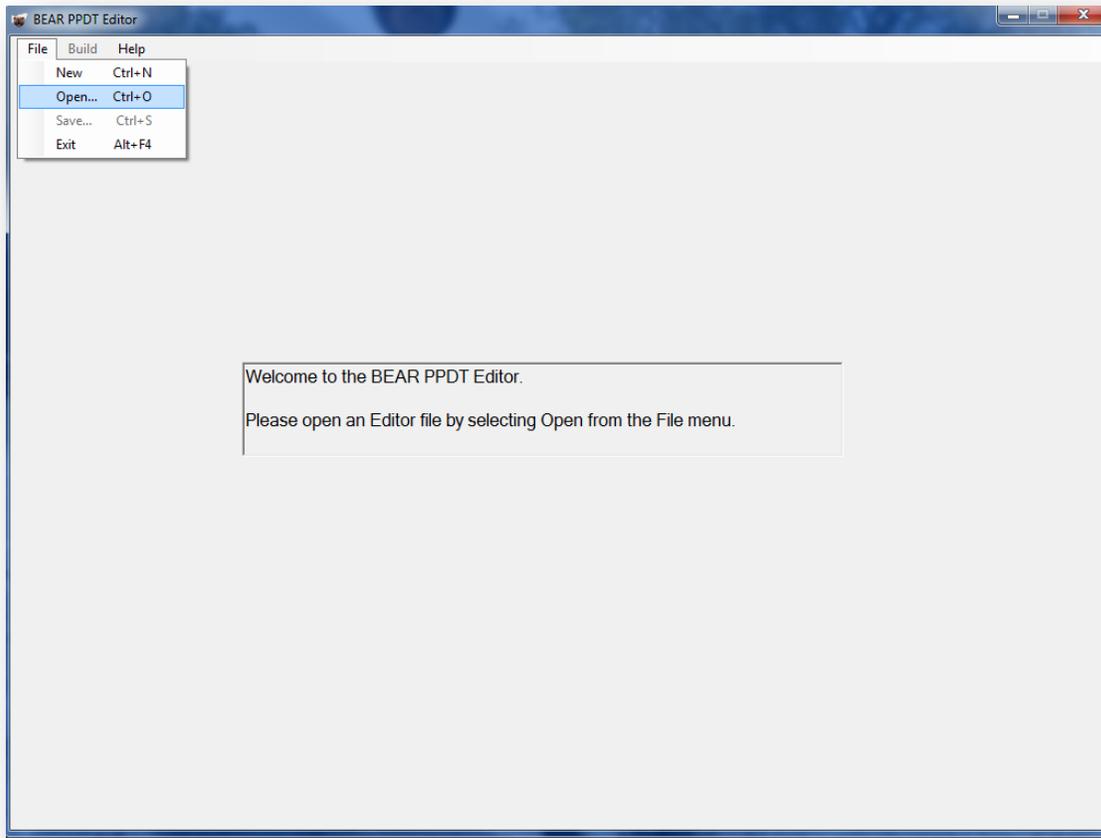


FIGURE 9OPEN

- 2) Navigate to the directory containing the **.pped** file.



3) Select a **.pped** file, and then click **Open**.

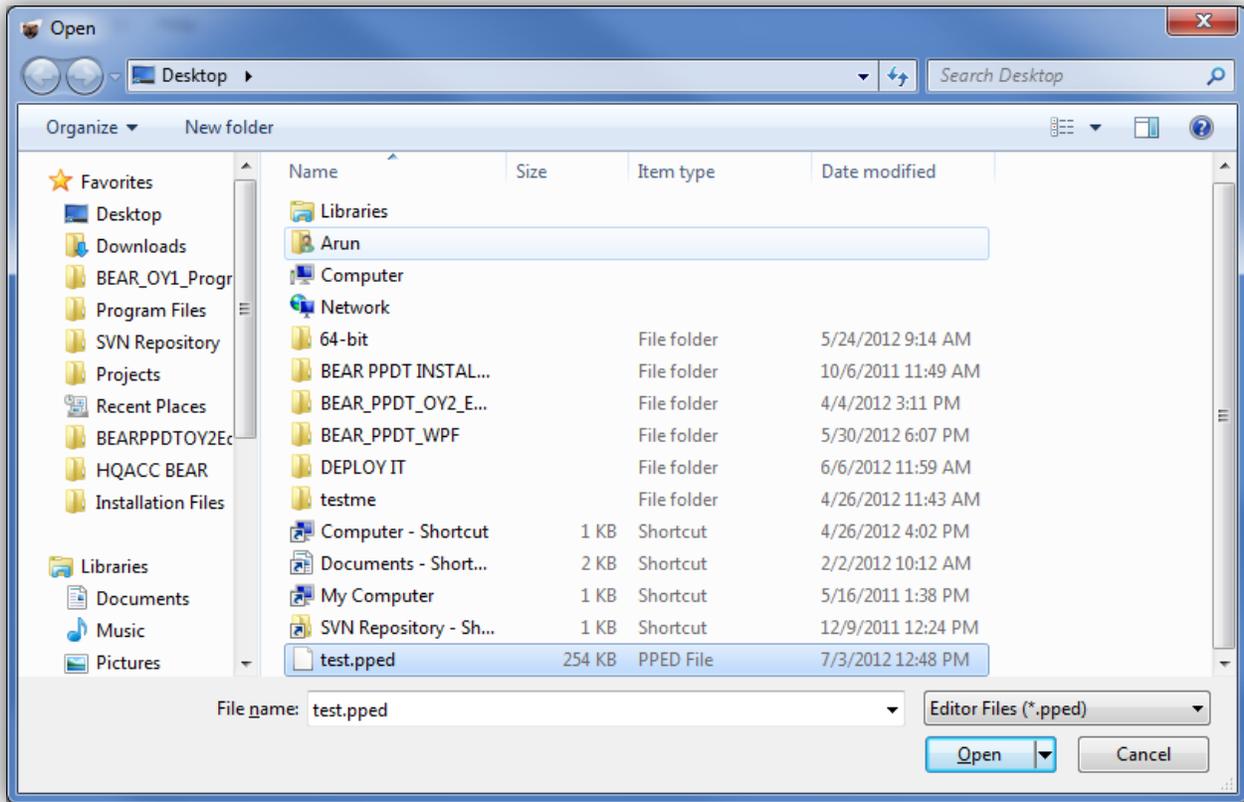


FIGURE 10.PPED FILE

[Return to the Procedures section of the manual.](#)

